




TRU-WELD Stud Welding

SHOULDER STUD – FULL WELD BASE

TYPE S STUD

TYPE F FERRULE SUPPLIED

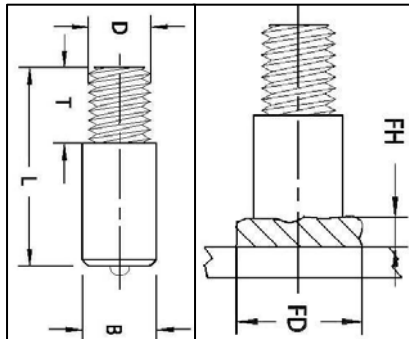

D Thread Diameter	T Thread Length	TRU-WELD Part Number	B Base Diameter	T Stud Length	FD Weld Fillet Diameter	FH Weld Fillet Height	Ferrule Part Number
1/4-20	3/8	3011-06-012-04-006	3/8	3/4	1/2	1/8	FER06-F
5/16-18	7/16	3011-07-014-05-007	7/16	7/8	19/32	9/64	FER07-F
3/8-16	1/2	3011-08-016-06-008	1/2	1	11/16	5/32	FER08-F
1/2-13	11/16	3011-10-020-08-011	5/8	1-1/4	7/8	3/16	FER10-F
5/8-11	11/16	3011-12-025-10-011	3/4	1-9/16	1-1/16	1/4	FER12-F
3/4-10	13/16	3011-14-030-12-013	7/8	1-7/8	1-1/8	5/16	FER14-F

S Studs are used in all types of applications. They can be welded to a flat surface, or to the inside or outside of an angle.

Length: Length is listed before weld. Stud diameters 1/2" and below will be approx. 1/8" shorter after welding. 5/8" - 3/4" will be approx. 3/16" shorter after welding.

TRU-WELD S Studs can be made in any length above the standard minimum.

Material: Low carbon steel, ASTM A29, 1010-1020. S Studs are also available in weldable stainless steel. Type 302 is the most commonly used. Other grades of stainless steel (except Type 303) are available when required.

Mechanical Property Requirements	
Tensile Strength	61,000 psi min.
Yield Strength	49,000 psi min.
Elongation (% in 2 in.)	17% min.
Elongation (% in 5x dia.)	14% min.
Reduction of Area	50% min.

BASE DIAMETER	CHUCK PART #	Light Duty Standard		Light Duty Split		Standard Combination
		FOOT PART #	GRIP PART #	FOOT PART #	GRIP PART #	FOOT AND GRIP #
3/8	CN-025	B-1N	GN-050	B-1C	GC-050	QN-050
7/16	CN-031	B-1N	GN-043	B-1C	GC-043	QN-044
1/2	CN-037	B-1C	GN-062	B-2C	GC-062	QN-062
5/8	CN-050	B-1C	GN-075	B-2C	GC-075	QN-075
3/4	CN-062	B-1C	GN-075	B-2C	GC-075	QN-075
7/8	CN-075	B-3N	GN-087	B-3C	GC-087	QN-087

TFP Corporation/TRU-WELD
460 Lake Road
Medina, Ohio 44256

(330) 725-7741
(330) 725-0161 Fax
Sales@tfpcorp.com

<http://www.tfpcorp.com>
<http://www.truweldstudwelding.com>
<http://www.weldstud.com>